


## HEAT PROOF CRANE SCALES – OCS-SH

- \* Model: OCS-SH
- \* Capacity: 5t--20t
- \* Standard: OIML III
- \* CE approved
- \* Units: Kg/lb/N
- \* A luminum die-casting enclosure
- \* 38mm LED display
- \* Infrared remote controller
- \* High duty bow shackle and hook
- \* Stainless steel button
- \* Low battery warning
- \* Battery: 6V/10Ah; Adapter, 9V/1500mA



|                   |             |
|-------------------|-------------|
| Accuracy class    | OIML III    |
| Tare range        | 100%F.S.    |
| Zero range        | 4%F.S.      |
| Safe overload     | 120%F.S.    |
| Ultimate overload | 400%F.S.    |
| Overload alarm    | 100%F.S.+9e |
| Battery           | 6V/10Ah     |
| Adaptor           | DC9V        |
| Battery life      | >100h       |

|             |               |
|-------------|---------------|
| Temperature | Safe distance |
| 1000°C      | 1.2 m         |
| 1200°C      | 1.5 m         |
| 1400°C      | 1.8 m         |
| 1600°C      | 2.0 m         |

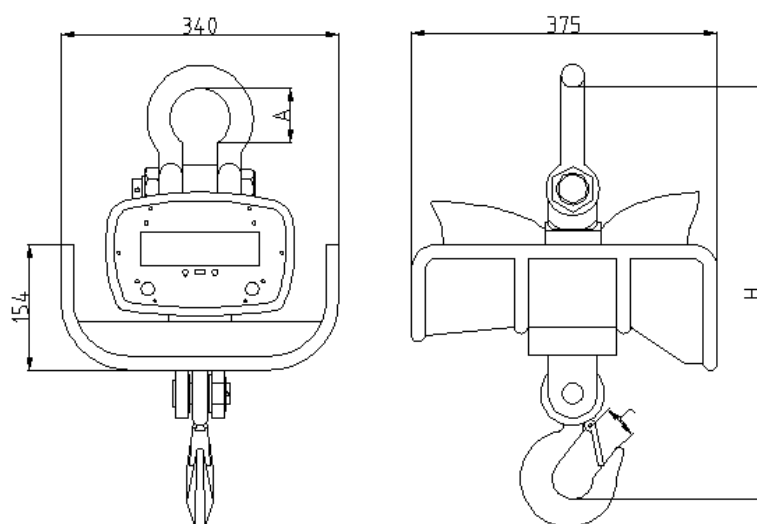

| MODEL     | CAPACITY<br>(kg) | RESOLUTION<br>(kg) | A<br>(mm) | C<br>(mm) | H<br>(mm) | NW.<br>(kg) | GW.<br>(kg) |
|-----------|------------------|--------------------|-----------|-----------|-----------|-------------|-------------|
| OCS-SH-5  | 5000             | 2                  | 122       | 60        | 710       | 50          | 55          |
| OCS-SH-10 | 10000            | 5                  | 144       | 70        | 835       | 75          | 78          |
| OCS-SH-15 | 15000            | 5                  | 166       | 85        | 900       | 80          | 86          |
| OCS-SH-20 | 20000            | 10                 | 260       | 90        | 1055      | 145         | 150         |